


## Model 1390 Banana Plug, Isolation

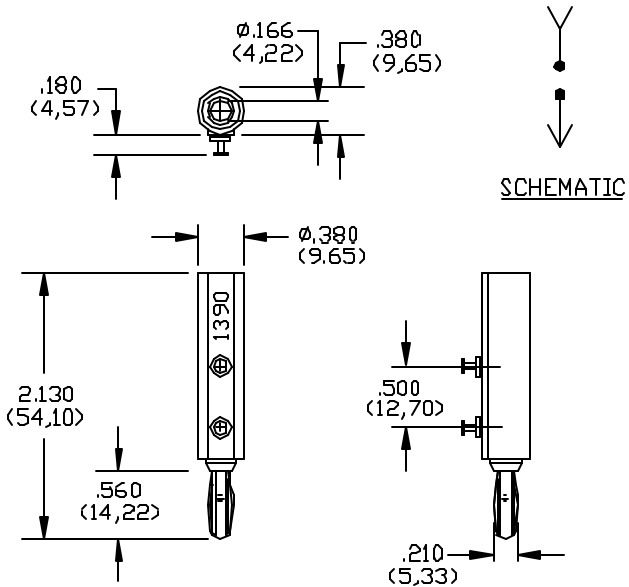

**FEATURES:**

- Provides two-terminal isolation.
- Top stack-up receptacles isolated from lower plug to permit addition of series resistors, diodes, etc.
- Ideal for computers, lab, circuit design and testing.
- Bright tin plated solder turret terminals for permanent noise-free connections.

**MATERIALS:**

Upper Conn: Banana Jack

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to banana jack and plug body.

Color: See Ordering Information

Marking: “Pomona 1390”

Lower Conn: Banana Plug

Material: Spring – Beryllium Copper per QQ-Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Turrets:

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Bright tin plated per MIL-T-10727, Type I, 100/250 microinches.

**RATINGS:**

Operating Temperature: +55° C. (+131° F.) Max.

Operating Voltage: Hand-held Testing:  
30VAC/60VDC Max.

Hands Free Testing in Controlled Voltage  
Environments: 2500WVDC Max.

Current: 15 Amperes

**ORDERING INFORMATION:** Model 1390-\*

\*=Color, -0 Black, -2 Red,

Ordering example: 1390-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA

**Sales: 800-490-2362 Fax: 888-403-3360**  
**Technical Assistance: 800-241-2060**