


Model 1837 Double Banana Plug, Three Terminal Isolation

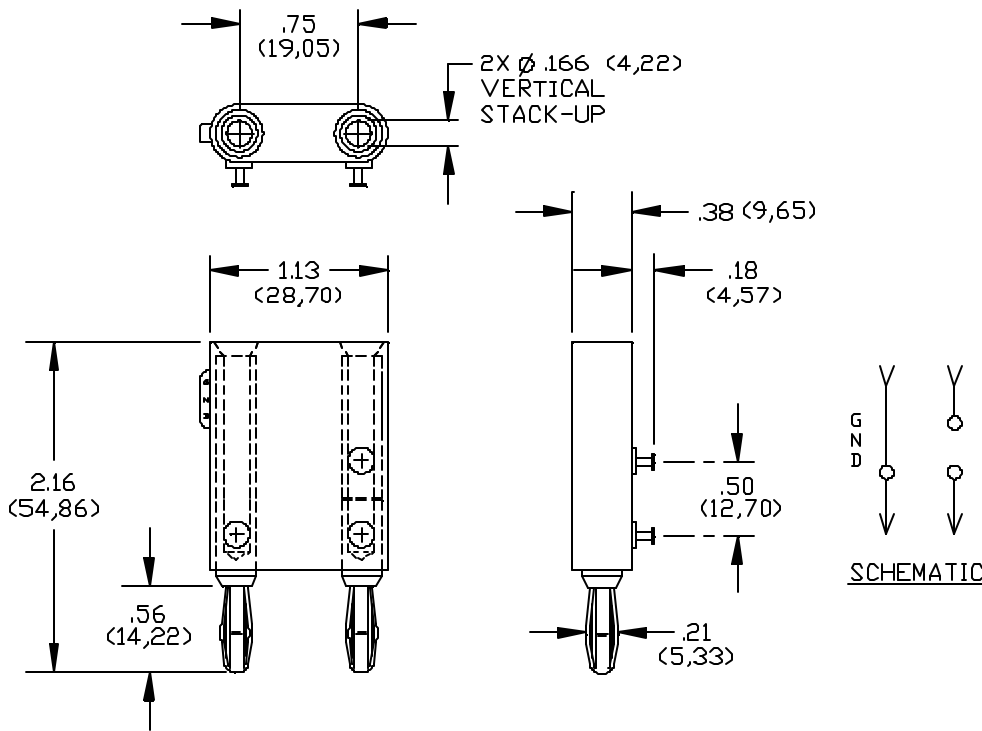

FEATURES:

- Used to make your own attenuator, balun or filter.

MATERIALS:

Upper Connector: Double Banana Jack
 Brass per QQ-B-626, Alloy 360, ½ hard.
 Finish: Nickel plate per QQ-N-290 Class 2 (.0002/.0003)
 Insulation: Polypropylene, molded to banana jacks and banana plug bodies. Color: Blue.
 Marking: “POMONA ELECTRONICS, CALIF.”, “MODEL 1837”
 Lower Connector: Double Banana Plug
 Spring - Beryllium Copper per QQ-C-533, Berylco 25, Cond. H.T.
 Plug Body – Brass per QQ-B-626, Alloy 360,

½ Hard.
 Finish: Nickel plate per QQ-N-290 Class 2 (.0002/.0003)
 Solder Turret Terminals:
 Brass per QQ-B-626, Alloy 360, ½ Hard.
 Finish: Bright tin plated per MIL-T-10727, Type I, (.0001/.0003).

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.
 Operating Voltage: 2500 VDC
 Current: 15 Amperes
 Contact Resistance: Less than .001 Ohms per banana plug

ORDERING INFORMATION: Model 1837

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA