


Model 4770 Spring-Loaded Binding Post

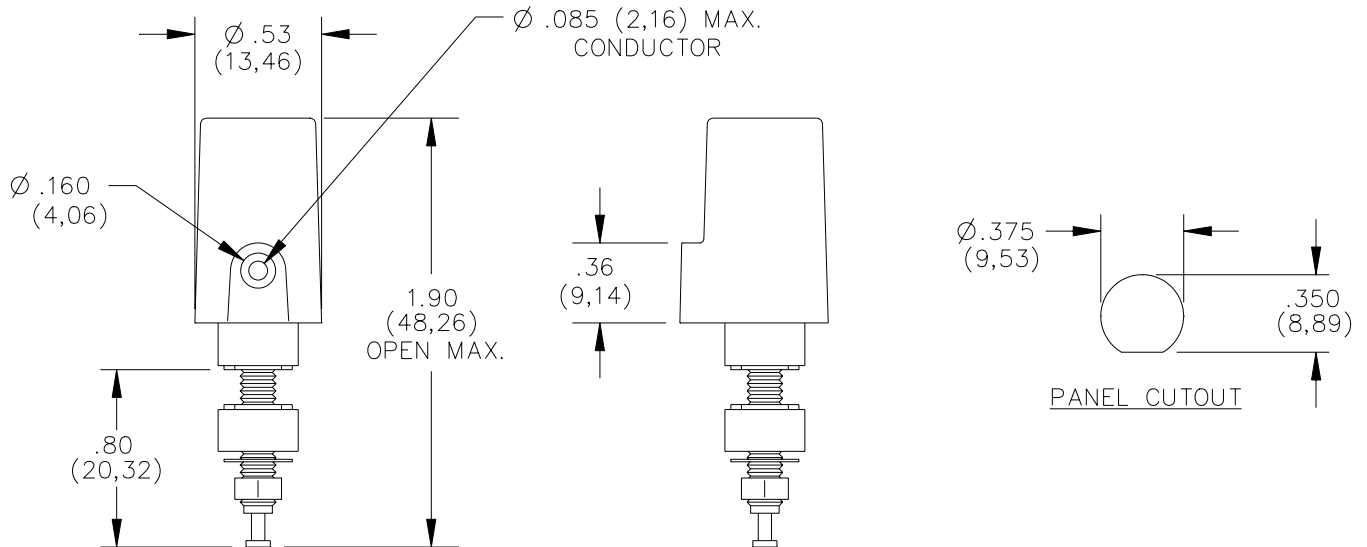

FEATURES:

- Mounts in panels from 1.60 (.063) to 9.53 (.375) thick.
- Accepts wires or plugs up to 2.16 (.085) DIA. with insulation up to 4.06 (.160) DIA.

MATERIALS:

Body: Bright Tin Plated Brass
 Insulation: Polycarbonate
 Lockwasher: Steel
 Hex Nut: Brass

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max.
 Hands free testing in controlled voltage environments: 630 VAC Max.
 Operating Temperature: +115°C (+239°F) Max.
 Current: 15 Amperes

ORDERING INFORMATION: Model 4770-*

*=Color, -0 Black, -2 Red,

Ordering Example: 4770-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA