



LK410-L LK410-L/SIL

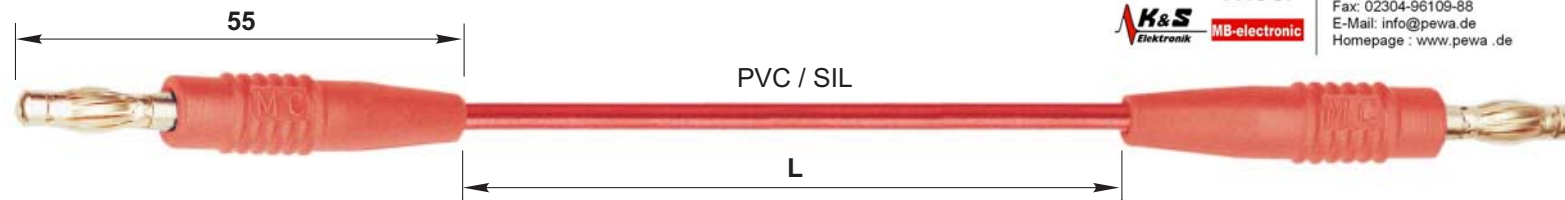

PEWA
Messtechnik GmbH

Weidenweg 21
58239 Schwerte

Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage: www.pewa.de



Hoch flexible Messleitungen mit PVC- oder Silicon-Isolierung, beidseitig mit axialem Ø 4 mm-Lamellenstecker.

Highly flexible test leads with insulation in PVC or Silicone with in-line Ø 4 mm Multilam plugs on both ends.

Cordons de mesure extra-souples à isolation en PVC ou Silicone, équipés des deux côtés d'une fiche à lamelles Ø 4 mm droite.

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Leitungsquerschnitt Lead cross section Section du câble		Längen [cm] Lead lengths [cm] Longueurs [cm]	*Farben *Colours *Couleurs																
LK410-L	28.0065-□*	30 V _{AC} ~ 60 V _{DC} / 19 A	1,0 mm ²	Au PVC	<table border="1"> <tr> <td>0 25</td> <td>0 50</td> <td>0 75</td> </tr> <tr> <td>1 00</td> <td>1 50</td> <td>2 00</td> </tr> </table>	0 25	0 50	0 75	1 00	1 50	2 00	<table border="1"> <tr> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	20	21	22	23	24	25	26	27	28	29
0 25	0 50	0 75																				
1 00	1 50	2 00																				
20	21	22	23	24																		
25	26	27	28	29																		
LK410-L/SIL	28.0066-□*	30 V _{AC} ~ 60 V _{DC} / 19 A	1,0 mm ²	Au SIL	<table border="1"> <tr> <td>0 25</td> <td>0 50</td> <td>0 75</td> </tr> <tr> <td>1 00</td> <td>1 50</td> <td>2 00</td> </tr> </table>	0 25	0 50	0 75	1 00	1 50	2 00	<table border="1"> <tr> <td></td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>26</td> <td></td> <td></td> <td></td> </tr> </table>		21	22	23	24	25	26			
0 25	0 50	0 75																				
1 00	1 50	2 00																				
	21	22	23	24																		
25	26																					