



FML SML

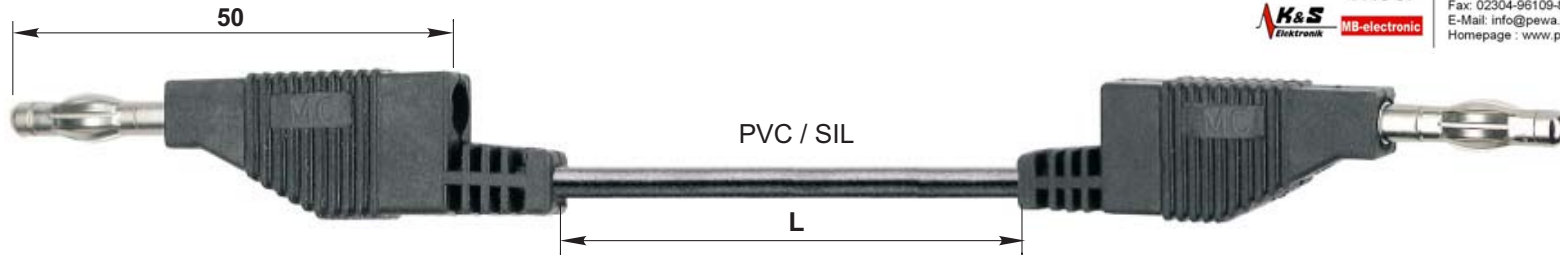

PEWA
Messtechnik GmbH
Weidenweg 21
58239 Schwerte
Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage: www.pewa.de



Hoch flexible Messleitungen mit PVC- oder Silicon-Isolierung, beidseitig mit umspritztem, stapelbarem Ø 4 mm-Lamellenstecker.

Highly flexible test leads with insulation in PVC or Silicone with moulded stackable Ø 4 mm Multilam plugs on both ends.

Cordons de mesure extra-souples à isolation en PVC ou Silicone, équipés des deux côtés d'une fiche à lamelles Ø 4 mm surmoulée à reprise arrière.

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Leitungsquerschnitt Lead cross section Section du câble		Längen [cm] Lead lengths [cm] Longueurs [cm]	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	---	--	--	----------------------------------

FML	64.7289 -□*	30 V _{AC} ~ 60 V _{DC} / 15 A	0,75 mm ²	Ni PVC	<table border="1"> <tr> <td>0 25</td> <td>0 50</td> <td>1 0 0</td> </tr> <tr> <td>1 5 0</td> <td>2 0 0</td> <td></td> </tr> </table>	0 25	0 50	1 0 0	1 5 0	2 0 0		<table border="1"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> <tr> <td>26</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	21	22	23	24	25	26				
0 25	0 50	1 0 0																				
1 5 0	2 0 0																					
21	22	23	24	25																		
26																						
SML	64.7288 -□*	30 V _{AC} ~ 60 V _{DC} / 15 A	0,75 mm ²	Ni SIL	<table border="1"> <tr> <td>0 25</td> <td>0 50</td> <td>1 0 0</td> </tr> <tr> <td>1 5 0</td> <td>2 0 0</td> <td></td> </tr> </table>	0 25	0 50	1 0 0	1 5 0	2 0 0		<table border="1"> <tr> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> </tr> <tr> <td>26</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	21	22	23	24	25	26				
0 25	0 50	1 0 0																				
1 5 0	2 0 0																					
21	22	23	24	25																		
26																						