
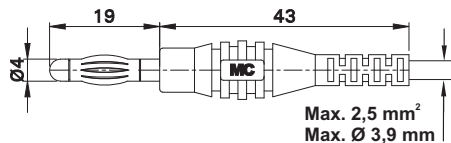


L-400

PEWA  
Messtechnik GmbHWeidenweg 21  
58239 SchwerteTel.: 02304-96109-0  
Fax: 02304-96109-88  
E-Mail: info@pewa.de  
Homepage: www.pewa.de

LS-400



KT-400

Axialer Ø 4 mm-Stecker mit federnder Kontakt-lamelle für die Selbstmontage von Messleitun-gen. **Lötanschluss.**

In-line Ø 4 mm plug with spring-loaded Multilam for self-assembly of test leads.  
**Solder connection.**

Fiche à lamelles Ø 4 mm droite, destinée à la confection de cordons de mesure.  
**Raccord à souder.**

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile: Knüpftülle / Stecker Component parts: Insulator / Plug Pièces détachées : Capuchon isolant / Fiche	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	---	----------------------------------

L-400

64.9294-\*

30 V<sub>AC</sub> ~ 60 V<sub>DC</sub> / max. 32 A

KT-400, 64.1015-\* / LS-400, 64.1016

Ni

21	22	23	24	25
----	----	----	----	----