


**Model 1432
Banana Jack to Pin Tip Plug**



PEWA
Messtechnik GmbH
Weidenweg 21
58239 Schwerte
Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage : www.pewa.de

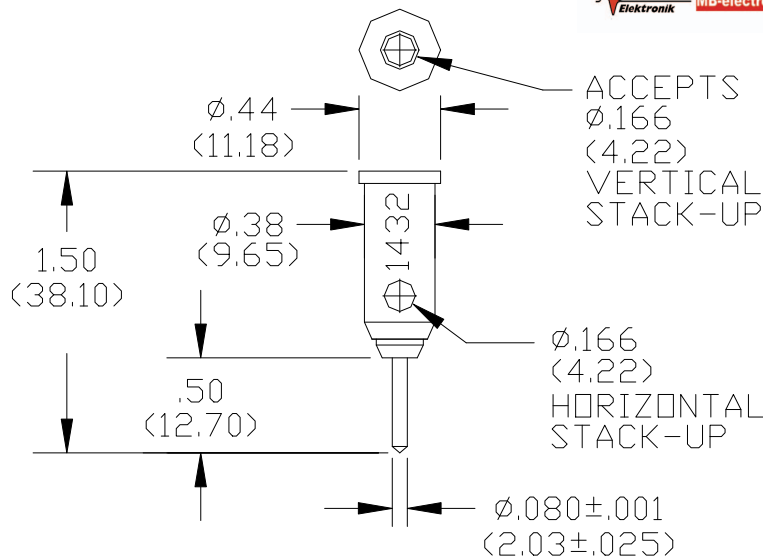

SCHEMATIC

**Model 1432
Banana Jack to Pin Tip Plug**

Features

- Permits banana plug cords to be used with equipment having pin tip jacks.

Materials

Banana Jack:

Material: Brass rod per ASTM B16-85, Temper H02.
Finish: Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

Pin Tip Plug:

Body: Brass rod per ASTM B16-85, Temper H02.
Finish: Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.

Insulation:

Material: Polypropylene molded to Banana Plug and Pin Tip bodies.
Marking: "1432, POMONA ELECTRONICS, CALIF."

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 3000 Vrms maximum.
For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.
Current: 5 Amperes

Ordering Information

Model: 1432-
*=Color, -0 (Black), -2 (Red)

Ordering Example: 1432-2 (Color is Red)
Other colors are available upon request.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 International: 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.